

# Yuasa Technical Data Sheet

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

### Yuasa YBX9096 - YBX9000 AGM Start Stop Plus Batteries

#### **Performance**

Voltage 12V Capacity (20-hour) 70Ah Cold Cranking Amps (EN1) 760A

## **Dimensions**

Length 278mm Width 175mm Height 190mm

# Weights & Measures

Mean Weight with Acid 20.5kg



#### **Container Features**

Case Type

Hold Down

Handles

End Venting

Semi-Traction Features

Lid Type

L3 DIN AGM

B3

✓

VV

VV

VV

VRLA

## **Technology**


Flame Arrestor
Technology
Separator
VDA Roll Over Test
Recommended Charge Rate
Performance Marking

✓
Ca/Ca VRLA
AGM
✓
4A
W5-C2-V3-M3

## **Terminal Type**

**Cell Assembly Layout** 

### **Battery Hold-down**

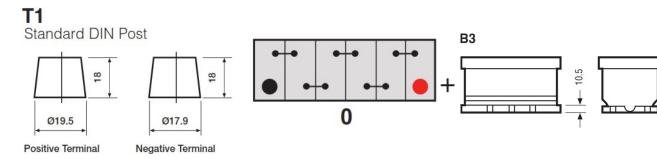

Data Sheet generated on 25/04/2023 - E&OE

