



DATA SHEET

RE7-12LFR

Yuasa AGM Battery

Specifications

Nominal Voltage	12
Capacity - c20 Ah	7
Capacity - c10 Ah	6.2
Capacity - c5 Ah	

Dimensions mm

Length	151
Width	65
Height	94
Height over Terminals	97.5
Weight Kg	2.75

Terminals

Terminal type	Faston-6.35mm
Terminal Layout	See Layout

Performance & Characteristics

Internal Resistance mOhm	35.0
Self Discharge	
Construction Type	Case Material, Flame Retardant - ABS (UL94:VO) VRLA - Valve Regulated Lead Acid AGM - Absorbed Glass Matt Maintenance-free (no topping up)

Design Life - EUROBAT Classification

6-9 years General Purpose


Approvals

Underwriters Laboratories (UL) USA

Applications

Excellent high-current properties
Very good charging efficiency
No hazardous materials as defined by IATA

Long life with low self-discharge. Applications: USV
Telecommunications
Emergency lighting systems
Fire alarm and security systems
Control systems
Electronic test devices.

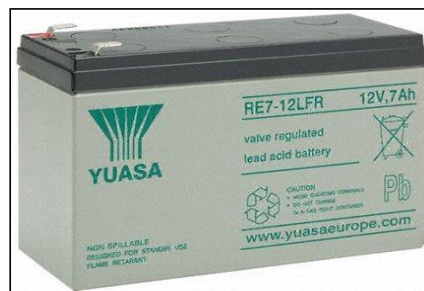

Layout



Recyclable



CPC Batteries accepts no liability for changes by the manufacturer - Suitability for application remains the responsibility of the end user

CPC Battery Services Ltd

Chancerygate Business Centre, 214 Red Lion Road, Surbiton, Surrey KT6 7RA

t 020 8397-1813 f 020 8397-1799

sales@cpcbatteries.co.uk

www.cpcbatteries.co.uk