



GS Technical Data Sheet

GS EFB110 - GS EFB Stop Start

Performance

| | |
|--------------------------|------|
| Voltage | 12V |
| Capacity (20-hour) | 75Ah |
| Cold Cranking Amps (EN1) | 730A |

Dimensions

| | |
|--------|-------|
| Length | 317mm |
| Width | 175mm |
| Height | 175mm |

Weights & Measures

| | |
|-----------------------|--------|
| Mean Weight with Acid | 20.4kg |
|-----------------------|--------|



Container Features

| | |
|---------------------------|----------------|
| Case Type | LB4 DIN EFB |
| Hold Down | B3 |
| State of Charge Indicator | ✓ |
| Handles | ✓ |
| End Venting | ✓ |
| Lid Type | SMF Double Lid |


Technology

| | |
|---------------------------|-------------------|
| Flame Arrestor Technology | ✓ |
| Separator | Ca/Ca |
| VDA Roll Over Test | PE |
| Vibration | ✓ |
| Recommended Charge Rate | V3 (60Hz/6g/20hr) |
| Performance Marking | 4A |
| | W4-C2-V3-M2 |

Terminal Type

T1


Standard DIN Post

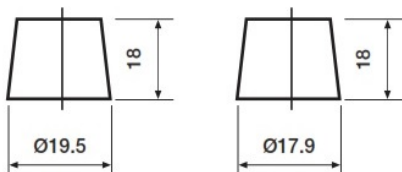


Positive Terminal

Negative Terminal

Cell Assembly Layout

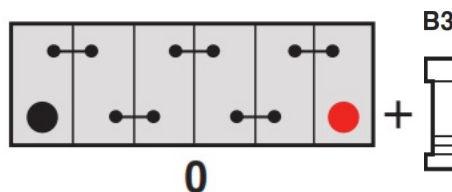

Battery Hold-down

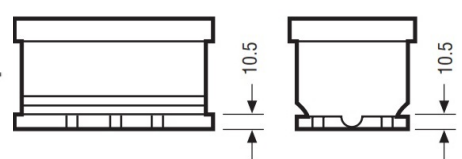

Data Sheet generated on 20/05/2020 - E&OE