



## GS Technical Data Sheet

### GS HJ-S34B20L - Auxiliary, Backup & Specialist Batteries

#### Performance

Voltage	12V
Capacity (20-hour)	35Ah
Cold Cranking Amps (EN1)	272A

#### Dimensions

Length	197mm
Width	129mm
Height	227mm

#### Weights & Measures

Mean Weight with Acid	10.5kg
-----------------------	--------



#### Container Features


Case Type	B20 JIS AGM
Hold Down	N
End Venting	✓
Semi-Traction Features	✓
Lid Type	VRLA

#### Technology

Flame Arrestor	✓
Technology	Ca/Ca VRLA
Separator	AGM
Vibration	V1 (30Hz/3g/2hr)
Recommended Charge Rate	2A
Performance Marking	W5-C2-V2-E2


#### Terminal Type

**T3**  
Small Japanese  
JIS Terminal



Positive Terminal      Negative Terminal

#### Cell Assembly Layout

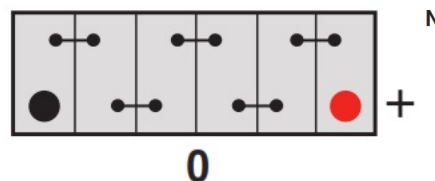

#### Battery Hold-down



Data Sheet generated on 28/05/2020 - E&OE