



## GS Technical Data Sheet

### GS SMF054 - GS SMF Battery

#### Performance

|                          |      |
|--------------------------|------|
| Voltage                  | 12V  |
| Capacity (20-hour)       | 36Ah |
| Cold Cranking Amps (EN1) | 330A |

#### Dimensions

|        |       |
|--------|-------|
| Length | 187mm |
| Width  | 127mm |
| Height | 223mm |

#### Weights & Measures

|                       |     |
|-----------------------|-----|
| Mean Weight with Acid | 9kg |
|-----------------------|-----|



#### Container Features

|                           |         |
|---------------------------|---------|
| Case Type                 | JIS B19 |
| Hold Down                 | N       |
| State of Charge Indicator | ✓       |
| Handles                   | ✓       |
| End Venting               | ✓       |


#### Technology

|                         |             |
|-------------------------|-------------|
| Flame Arrestor          | ✓           |
| Technology              | Ca/Ca       |
| Separator               | PE          |
| Recommended Charge Rate | A           |
| Performance Marking     | W4-C2-V3-E1 |


#### Terminal Type

##### T1/T3


Standard DIN Post



Remove T1 adapter for T3



#### Cell Assembly Layout

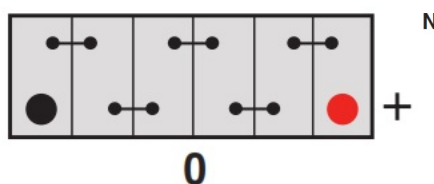

#### Battery Hold-down



Data Sheet generated on 02/06/2020 - E&OE