



GS Technical Data Sheet

GS SMF069 - GS SMF Battery

Performance

| | |
|--------------------------|------|
| Voltage | 12V |
| Capacity (20-hour) | 72Ah |
| Cold Cranking Amps (EN1) | 600A |

Dimensions

| | |
|--------|-------|
| Length | 264mm |
| Width | 175mm |
| Height | 220mm |

Weights & Measures

| | |
|-----------------------|--------|
| Mean Weight with Acid | 17.6kg |
|-----------------------|--------|



Container Features

| | |
|---------------------------|--------------|
| Case Type | JIS D26 + B7 |
| Cell Layout | 1 |
| Hold Down | B7 |
| State of Charge Indicator | ✓ |
| Handles | ✓ |
| End Venting | ✓ |

Technology

| | |
|-------------------------|-------------|
| Flame Arrestor | ✓ |
| Technology | Ca/Ca |
| Separator | PE |
| Recommended Charge Rate | A |
| Performance Marking | W4-C2-V2-E1 |


Terminal Type

Cell Assembly Layout

Battery Hold-down


T1

Standard DIN Post

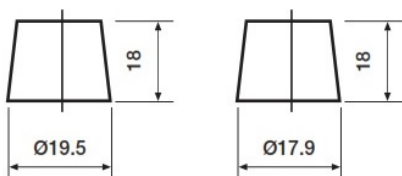

Positive Terminal

Negative Terminal

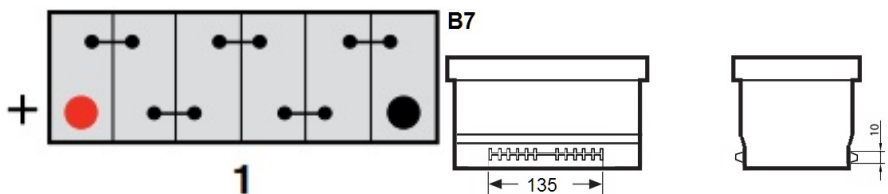

Data Sheet generated on 09/06/2020 - E&OE