



GS Technical Data Sheet

GS SMF629

Performance

| | |
|--------------------------|-------|
| Voltage | 12V |
| Capacity (20-hour) | 180Ah |
| Cold Cranking Amps (EN1) | 1175A |

Dimensions

| | |
|--------|-------|
| Length | 511mm |
| Width | 222mm |
| Height | 215mm |

Weights & Measures

| | |
|-----------------------|--------|
| Mean Weight with Acid | 45.3kg |
|-----------------------|--------|



Container Features

| | |
|---------------------------|-------|
| Case Type | DIN B |
| Cell Layout | 3 |
| Hold Down | N |
| State of Charge Indicator | ✓ |
| Handles | ✓ |


Technology

| | |
|-------------------------|-------------|
| Recommended Charge Rate | A |
| Performance Marking | W3-C2-V4-E2 |

Terminal Type

T1


Standard DIN Post

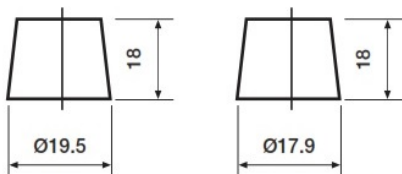

Positive Terminal

Negative Terminal

Cell Assembly Layout

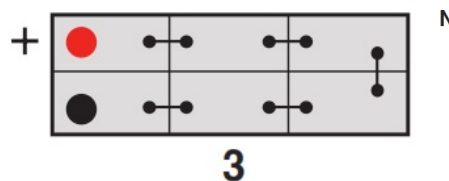

Battery Hold-down



Data Sheet generated on 04/05/2021 - E&OE