



Yuasa Technical Data Sheet

Yuasa YBX5069 - YBX5000 Silver High Performance SMF Batteries

Performance

| | |
|--------------------------|------|
| Voltage | 12V |
| Capacity (20-hour) | 75Ah |
| Cold Cranking Amps (EN1) | 650A |

Dimensions

| | |
|--------|-------|
| Length | 269mm |
| Width | 174mm |
| Height | 225mm |

Weights & Measures

| | |
|-----------------------|--------|
| Mean Weight with Acid | 18.1kg |
|-----------------------|--------|



Container Features

| | |
|---------------------------|----------------|
| Case Type | JIS D26 + B9 |
| Cell Layout | 1 |
| Hold Down | B5 |
| State of Charge Indicator | ✓ |
| Handles | ✓ |
| End Venting | ✓ |
| Lid Type | SMF Double Lid |

Technology

| | |
|---------------------------|-------------|
| Flame Arrestor Technology | ✓ |
| Separator | Ca/Ca |
| VDA Roll Over Test | PE |
| Recommended Charge Rate | ✓ |
| Performance Marking | 4A |
| | W4-C2-V3-E1 |


Terminal Type

T1


Standard DIN Post



Cell Assembly Layout

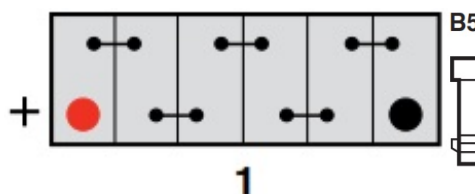

Battery Hold-down

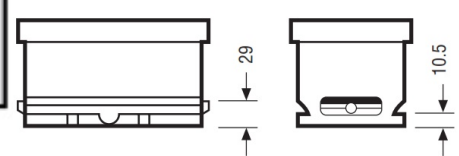

Data Sheet generated on 15/02/2024 - E&OE